

JORDAHL studrail JDA is approved for static and dynamic loads (German approval no. Z-15.1-214).


The installation of the JDA FT-Klick has to follow the design and the indication of the reinforcement drawing

color coding
 JDA-FT-Klick

1.
 Position the JDA rails (without double headed anchor) properly on the formwork with the spacers in according to the static calculation and design.

2.
 JDA double headed anchor should be built in after installing and positioning of the reinforcement.

3.
 Attention:
 Double headed anchor must be engaged into the rail before pouring the concrete!
 The colour of double headed anchor must corresponded to the colour of the stud.
 Example:
 red stud to red rail.

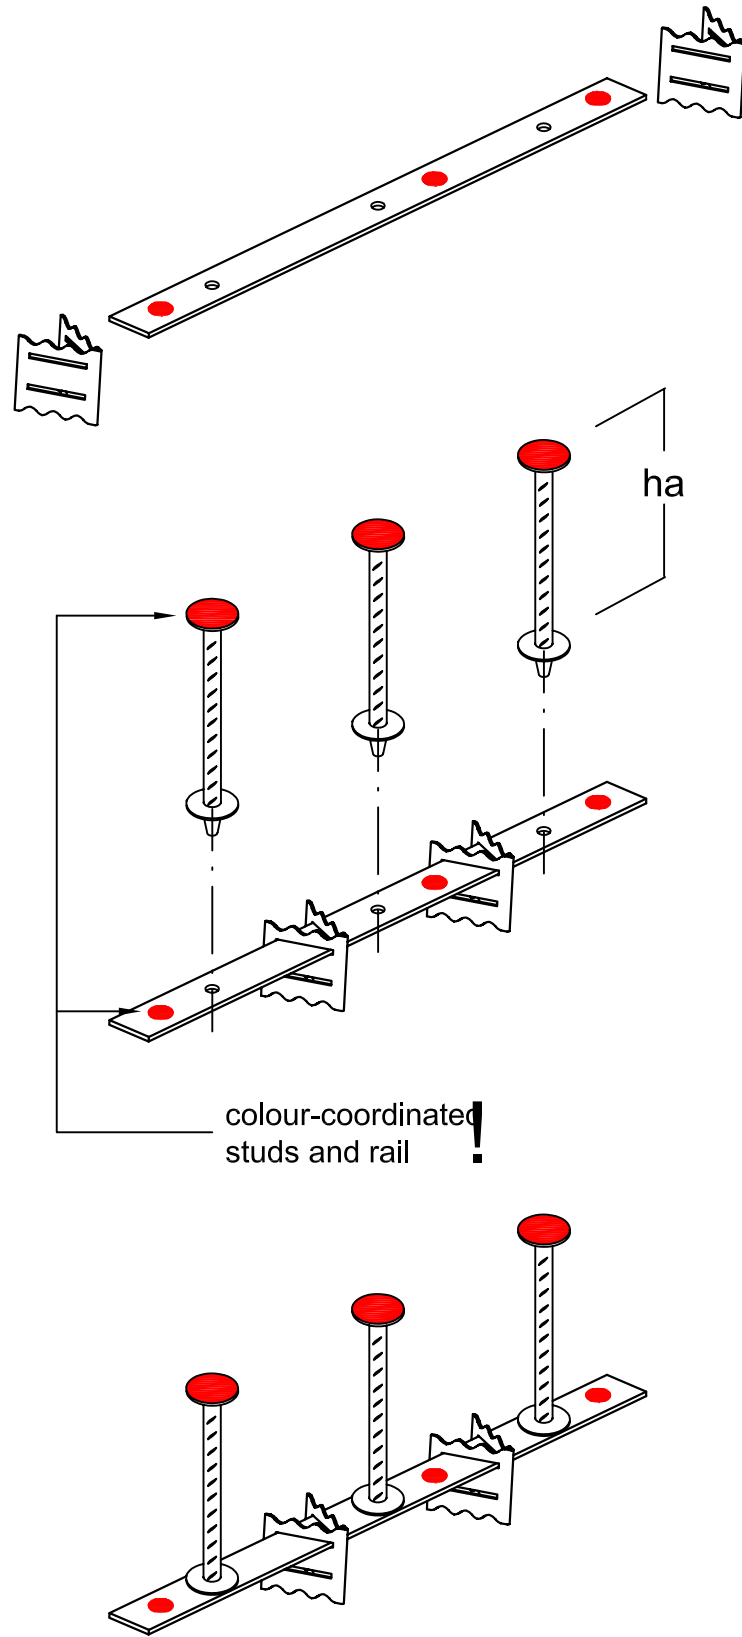

ha	colour	
135	orange	
145	red	
155	white	
165	yellow	
175	grey	
185	blue	
195	black	
205	green	
215	light blue	
225	light green	
235	orange	
245	red	
255	white	
265	yellow	
275	grey	
285	blue	
295	black	
305	green	
315	light blue	
325	light green	